

COMPUTORQ 3 ELECTRONIC TORQUE WRENCHES

The **COMPUTORQ 3 Electronic Torque Wrench** is a simple to use digital readout wrench that displays real time torque values in any of four torque units, ft.lbs., in.lbs., Nm, kg.cm. Simply set the desired torque value and apply force until the green LED illuminates. Great for light industrial, automotive, motorcycle, watercraft and aircraft applications.

FEATURES

- Sleek new design
- 15-degree flex ratcheting head
- Push button socket release head
- Large, easy to read digital display
- Long battery life, uses 2 each CR123 lithium batteries
- Ergonomically designed molded non-slip rubber grip
- Torques in both clockwise and counterclockwise directions
- Battery saving auto-shutoff after two minutes
- COMPUTORQ 3 remembers last unit and torque setting selected
- Audible tone sounds when set torque value is reached, if the set torque value is exceeded, an alarm tone will sound.
- 3 color LED light bar
 YELLOW LED indicates approaching desired torque setting
 GREEN LED indicates desired torque value is reached
 RED LED indicates fastener was overtorqued, loosen and retighten.
- When desired torque value is reached, display will hold value and flash for ten seconds.
- COMPUTORQ 3 will operate in any of four torque units, foot pounds (ft. lbs.), inch pounds (in. lbs.), newton meter (Nm) or kilogram centimeter (kg. cm.).
- ACCURACY:
 ± 2% CW of readings from 20% to 100% of full scale
 ± 3% CCW of readings from 20% to 100% of full scale
- N.I.S.T. traceable certificate of calibration included
- Meets or exceeds ASME B107.28 - 2005

TORQUE TOOLS

DIGITAL WRENCHES




COMPUTORQ 3 ELECTRONIC TORQUE WRENCHES

Product Code	Drive	Ft. Lb.	In. Lb.	Nm	Kg. Cm.	Length		Wt. Lbs. (kgs)
						In. (mm)		
2401CI3	1/4"	2.0 - 20.0	24 - 240	2.71 - 27.10	27.6 - 276	15 (381)		2.0 (.91)
1002CF3	3/8"	10.0 - 100.0	120 - 1200	13.6 - 135.6	138 - 1382	17 (432)		2.2 (1.0)
2503CF3	1/2"	25 - 250	300 - 3000	33.8 - 338	345 - 3456	27 (686)		3.5 (1.59)

COMPUTORQ 3 ELECTRONIC TORQUE WRENCHES FOR HIGH ACCURACY

Product Code	Drive	Ft. Lb.	In. Lb.	Nm	Kg. Cm.	Length		Wt. Lbs. (kgs)
						In. (mm)		
2401CI3HA*	1/4"	2.0 - 20.0	24 - 240	2.71 - 27.10	27.6 - 276	15 (381)		2.0 (.91)
1002CF3HA*	3/8"	10.0 - 100.0	120 - 1200	13.6 - 135.6	138 - 1382	17 (432)		2.2 (1.0)
2503CF3HA*	1/2"	25 - 250	300 - 3000	33.8 - 338	345 - 3456	27 (686)		3.5 (1.59)

***HIGH ACCURACY 1% Clockwise direction only.**  **It couldn't be easier to use!**

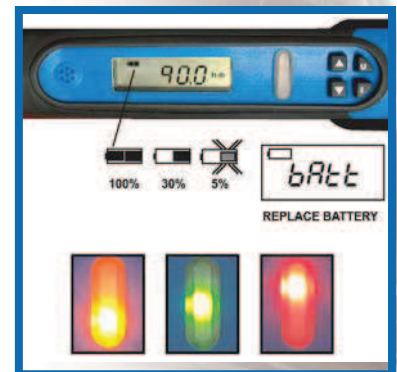

COMPUTORQ 3 Display and 3 Color LED Light Bar



WARNING

- Do not exceed rated torque.
- Periodic recalibration is necessary to maintain accuracy.
- Do not use a torque wrench to break fasteners loose.
- Frequently inspect, clean and lubricate ratchet mechanism with light oil.